




613 Basalt Fiber CHOPPED STRAND FOR CEMENT CONCRETE

used for making electrical parts, automotive parts, pipes, daily necessities, etc.

PRODUCT

BFCS 613 - 13- 3

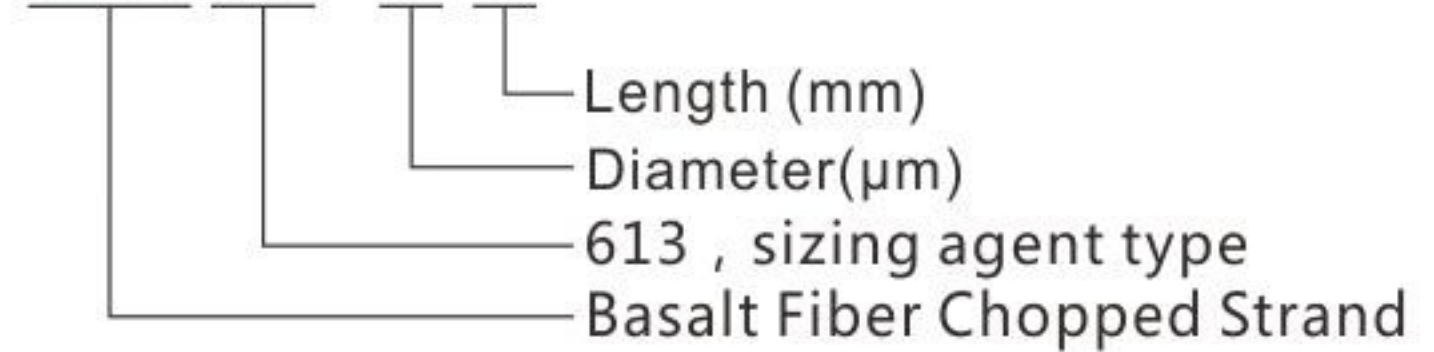

➤ INTRODUCTION

Basalt chopped fiber standard products for reinforced PP and PE. Suitable for PP, PE resin, used in modified twin-screw extrusion process, blending with resin, extrusion granulation.

➤ FEATURE

Good combination with resin, good reinforcement effect;The product produces less yarn;The dispersion coefficient is good during extrusion;Good temperature resistance;It can make dark color products.

➤ SPECIFICATION AND PERFORMANCE

Series of product	Sizing agent type	Diameter (µm)	length (mm)	combustible matter content (%)	Moisture content (%)
		GB/T 7690.5	-	GB/T 9914.2	GB/T 9914.1
BFCS613-10-3/4.5/6	Silane	10±1	3±1 4.5±1 6±1	0.55±0.1	<0.1
BFCS613-13-3/4.5/6	Silane	13±1	3±1 4.5±1 6±1	0.55±0.1	<0.1

The specification and size can be customized according to users 'demand.

Storage: it should be placed in a dry and cool place to prevent moisture; it is recommended to keep indoor temperature balance; it should be kept in the original package before use.